


**Features**

1. Compact,light,easy surface mounting
2. Autometed mounting and reflow soldering
3. High impedance and low loss
4. The products contain no lead and also support lead-free solderi
- 5, All matrials ROHS compliance and use are UL listed



**Application**


1. Switching power supply
2. Computer products
3. DVD
4. DC-DC converter



**Electrical characteristics**

Model No.	Winding ratio Primary secondary	Inductance	secondary leakage inductance	DC Resistance at:25°C	Insulation withstand voltage	Test frequency voltage (KHz/V)
EFD15T580L235	(1-4):(6-8)=23:290	(6-8)=235mH±25%	200uH MAX (pri short)	(1-4)=180mΩ MAX (6-8)=2.5Ω MAX	pri to sec AC 1.0KV/5mA 1SEC pri to core AC 0.5KV/5mA 1SEC sec to core AC 0.5KV/5mA 1SEC	1KHz/0.25V

**Schematics(bottom)**

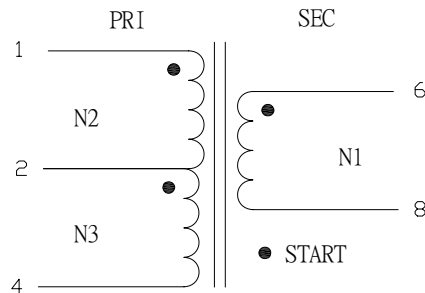

**Shapes and dimensions unit: mm**

